


MODEM AINDA ROTEADO:

10.1.1.1

MEU PC PARA TESTES:

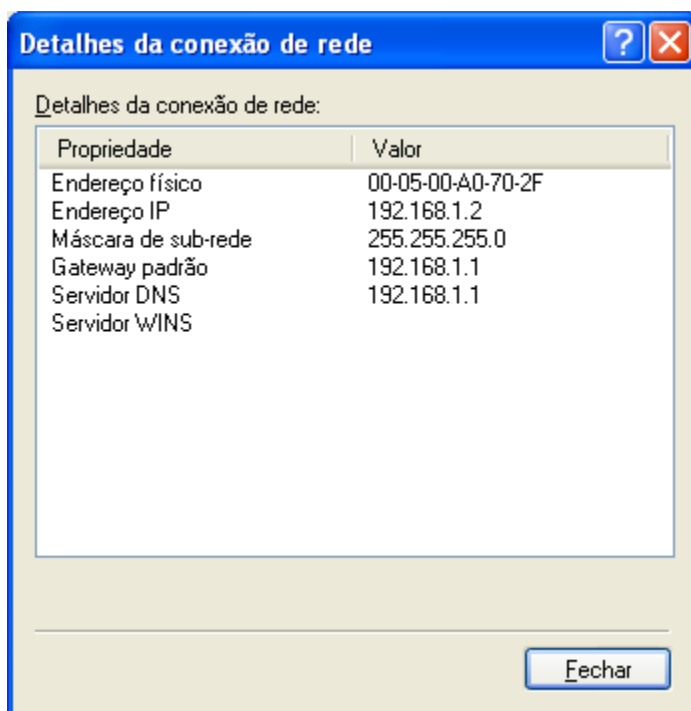

## CONFIGURAÇÃO DO MIKROTIK

MikroTik WinBox Loader v2.2.16

Connect To: 00:08:54:AA:01:BF ... Connect

Login:	MAC Address	IP Address	Identity	Version	Board N...
Password:	00:08:54:AA:01:BF	192.168.1.1	MikroTik	2.9.27	

**Interface List**

	Name	Type	MTU	Tx Rate	Rx Rate	Tx Pac...	Rx Pac...
R	clientes	Ethernet	1500	10.9 kbps	7.0 kbps	8	8
R	link	Ethernet	1500	1275 bps	0 bps	1	0

**Address List**

	Address	Network	Broadcast	Interface
	10.1.1.2/16	10.1.0.0	10.1.255.255	link
	192.168.1.1/24	192.168.1.0	192.168.1.255	clientes

**Route <0.0.0.0/0>**

Destination: 0.0.0.0/0 OK

Gateway: 10.1.1.1 Cancel

Check Gateway: Apply

Distance: Disable

Mark: Comment

Pref. Source: Copy

Interface: link Remove

disabled active static

**DNS Settings**

Primary DNS: ☒ 200.175.5.139 OK

Secondary DNS: ☒ 200.175.89.139 Cancel

☒ Allow Remote Requests Apply

Cache Size: 2048 KiB

Cache Used: 29 KiB

**NAT Rule <!192.168.1.0/>**

General Advanced Extra Action Statistics

Chain:

Src. Address: ☐ 192.168.1.0/24

Dst. Address:

Protocol:

Src. Port:

Dst. Port:

In. Interface:

Out. Interface:

Packet Mark:

Connection Mark:

Routing Mark:

Connection Type:

disabled

OK Cancel Apply Disable Comment Copy Remove

**NAT Rule <192.168.1.0/>**

General Advanced Extra Action Statistics

Action:

OK Cancel Apply Disable Comment Copy Remove

**Terminal**

```

MMMM  MMMM  KKK                      TTTTTTTTTT  KKK
MMM  MMMM  MMM  III  KKK  KKK  RRRRRR  000000  TTT  III  KKK  KKK
MMM  MM  MMM  III  KKKKK  RRR  RRR  000 000  TTT  III  KKKKK
MMM  MMM  III  KKK  KKK  RRRRRR  000 000  TTT  III  KKK  KKK
MMM  MMM  III  KKK  KKK  RRR  RRR  000000  TTT  III  KKK  KKK

MikroTik RouterOS 2.9.27 (c) 1999-2006      http://www.mikrotik.com/

Terminal vt102 detected, using multiline input mode
[admin@MikroTik] > ping www.uol.com.br
200.221.2.45 64 byte ping: ttl=54 time=39 ms
200.221.2.45 64 byte ping: ttl=54 time=39 ms

```