

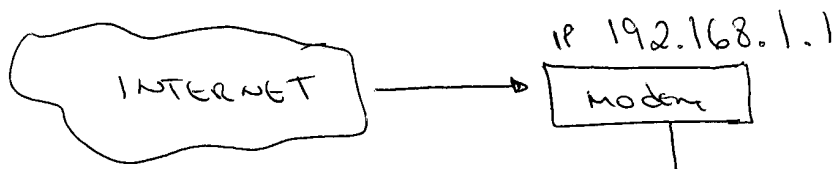


Sinal ADSL




Obs: Não sei qual
ip definir na ETH1
e na ETH2, e criar
as rotas.


Qual ip definir nas
WLAN's de forma
que eu só consiga
distribuir no máximo
20 ips por WLAN.



192.168.1.2
Distribui somente
6 ips.

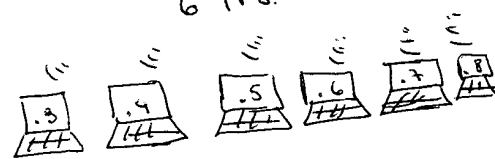

De: 192.168.1.3 A
192.168.1.8

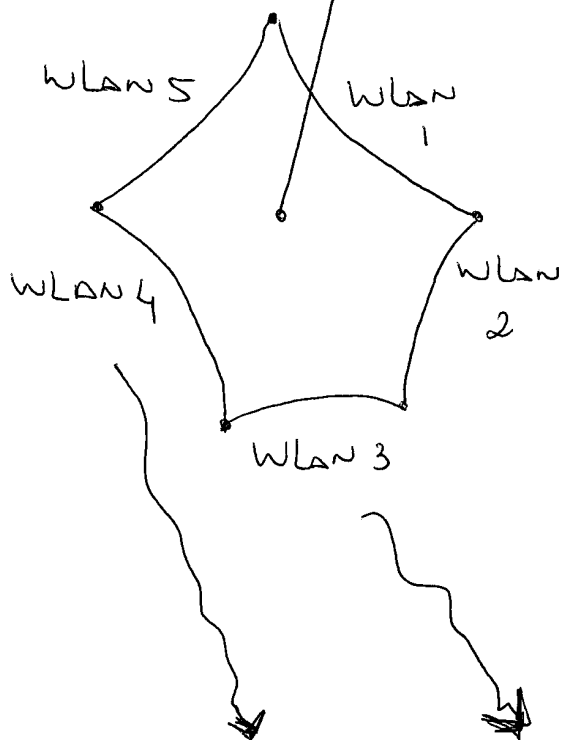

Sinal recebido de
WLAN 2

200.168.10.20
A
200.168.10.40



200.169.10.20
Sinal recebido
de WLAN 1



200.166.10.20
A
200.166.10.40



200.167.10.20
A
200.167.10.4



200.169.10.x